

FGP-2410 Version: 1




## 26-Port Fast Ethernet PoE Switch, 2 Ports Gigabit SFP/RJ45 Combo, 802.3af/at PoE Plus, 24 PoE Outputs, 240W

LevelOne FGP-2410 provides 24 10/100Mbps ports with IEEE 802.3at PoE-Plus supported and plus 2 Gigabit Combo SFP ports. It supports MDI / MDI-X convertible on 24-10/100Mbps ports and provides PoE inject function on PoE ports.

With its 8.8Gbps non-blocking switch fabric, 4K MAC Address table, and 802.3x, full-duplex flow control, the FGP-2410 offers wire-speed packet transfer performance without risks of packet loss. All 24 Fast Ethernet RJ-45 copper interfaces support 10/100Mbps and 2 Gigabit Ethernet RJ-45 copper interfaces support 10/100/1000Mbps autonegotiation for optimal speed detection through RJ-45 Category 6, 5 or 5e cables. MDI/MDI-X auto detection is provided for direct wire connection to any Ethernet devices like switches, hubs, or workstations without requiring a crossover cables. Through the front panel LED indicators, users can easily tell the network connection status directly from the indicators.

The FGP-2410 also provides a simple, cost-effective, and highly reliable network connection for data and power transmission. Furthermore, it is the ideal device for bridging among Ethernet, Fast Ethernet workgroups and networks. It fits all kind of Ethernet installations such as campus, workgroup, department, enterprise, telecom or industrial applications.

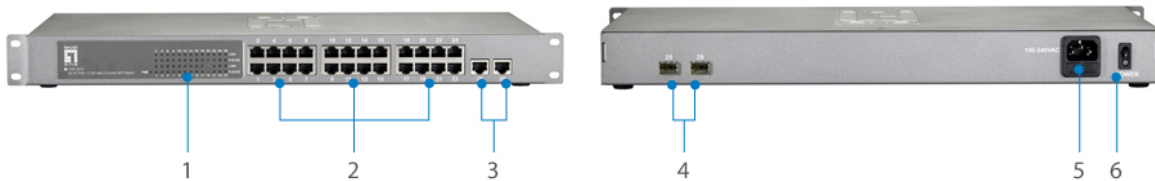

1. LEDs
2. 10/100Mbps RJ-45
3. 10/100/1000Mbps RJ-45

4. SFP (Mini-GBIC) slot
5. Power Socket
6. Power On / Off Switch

### Key Features

- 24 PoE-Plus Fast Ethernet ports and 2 Gigabit combo (RJ-45/SFP) ports
- IEEE 802.3af/at PoE compliant to simplify deployment and installation
- Supports 4K MAC address auto-learning and auto-aging
- Auto-detection and protection of non-standard PoE devices
- IEEE 802.3x Flow Control protects against lost packets for reliable data transmission



- 19-inch metal housing
- Total PoE power budget: 240W, up to 30W per port
- 

---

## Works Well With



### **SFP-3001**

1.25G MMF SFP Transceiver, 550m, 850nm



### **SFP-3711**

1.25G SMF SFP Transceiver, 120km, 1550nm

---

## Specifications

### System Specifications

#### Standards & Protocols:

IEEE 802.3 10-BASE-T, Ethernet  
IEEE 802.3u 100-BASE-TX, Fast Ethernet  
IEEE 802.3ab 1000BASE-T, Gigabit Ethernet  
IEEE 802.3x Full-duplex Flow Control  
IEEE 802.3af Power over Ethernet (PoE)  
IEEE 802.3at Power over Ethernet Plus (PoE+)

#### Buffer Memory:

352KB

#### Connectors and Cabling:

24 x 10/100Base-TX RJ-45 PoE Ports  
2 x 10/100/1000Base-T RJ-45 Ports with 2 shared 1000Base-X SFP Slot

#### Button:

Power On/Off Switch

#### Indicator:

Power; Link/Active; PoE

#### Transmission Method:

Store-and-Forward

#### Power:

Power Consumption: < 250W  
Power Input: 100-240V AC, 50-60 Hz, 5A, Internal Power Supply

### Features

#### PoE:

Power Budget: Max. 240W  
Power Output: 56V DC, up to 30W per port  
Protection: PoE over current & PoE circuit sorting protection, PD classification identity  
Pin Assignment: 1/2(+), 3/6(-)

### Performance

**Backplane (Gbps):**

8.8Gbps

**MAC Address Table:**

4K

**Data Transfer Rate:**

10/100/1000Mbps

**Packet Forwarding Rate:**

1000Mbps port - 1,488,000pps

100Mbps port - 148,000pps

10Mbps port - 14,880pps

## Environment

**Temperature (°C):**

Operating: 0°C ~ 45°C

Storage: - 40°C ~ 70°C

**Humidity (Non-condensing):**

Storage: 10% ~ 90%

Operating: 10% ~ 90%

## Physical Specifications

**Dimensions (W x D x H mm):**

200 x 480 x 44 mm

**Weight (g):**

3800 g

## Others

**Approval and Compliance:**


FCC, CE

**Deployment:**

Desktop and 19-inch rack-mountable



## Diagram

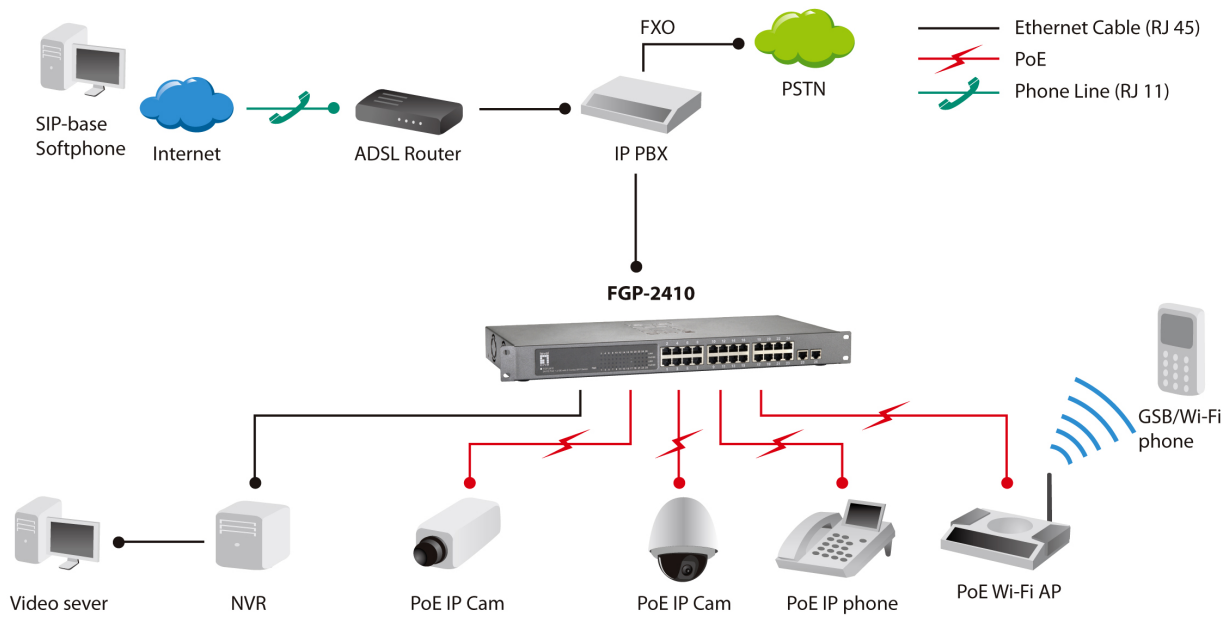

## Order Information

FGP-2410

## Package Contents

FGP-2410  
Power Cord  
Rubber Feet  
Quick Installation Guide

No liability or responsibility for any errors or omissions in the content.  
Specifications are subject to change without notice.  
All mentioned brand names are registered trademarks and property of their owners.  
Copyright © Digital Data Communications GmbH, Germany. All Rights Reserved.